

DS Vision 3000 Receiver and Receiver Long

Quick Installation Guide

This guide explains how to connect and mount the DS Vision 3000 Receiver / Receiver Long units.

1. The Receiver and Receiver Long ports

The figures below illustrates the Receiver and Receiver Long ports

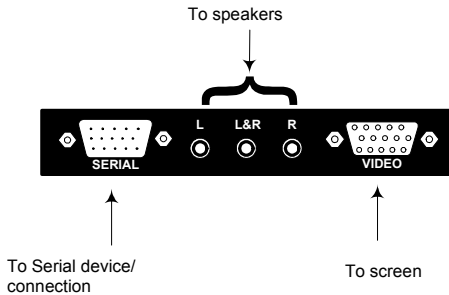


Figure 1 Receiver and Receiver Long – side 1

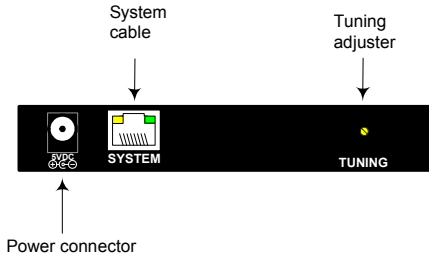


Figure 2 Receiver – side 2

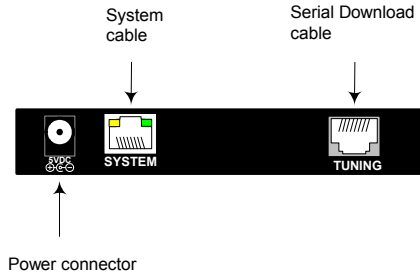


Figure 3 Receiver Long – side 2

2. Connecting the Receiver /Receiver Long

1. Connect the screen to the Video port.
2. Connect the audio/speakers to the Audio port/s. Where the audio/speakers have one stereo jack, connect it to the L&R port. Where the audio/speakers have two separate connectors connect the left speaker connector to the L port and the right speaker connector the R port.
3. Where relevant connect the Serial connection to the Serial port

2.1 Connecting to the DS Vision 3000 system

Connect the Receiver / Receiver Long units to the DS Vision 3000 system using CATx (CAT 5/5e/6/7 UTP) cables. Connect the CATx cables between the System ports of the Broadcaster/Transmitter and Receivers/Receivers Long.

2.2 Connecting to the power supply

Connect all Receiver units to the power supply with 5 VDC, 1A from the AC/DC adapters provided. **Ensure correct polarity (Center negative) and voltage.**

3. Mounting the Receiver / Receiver Long

The Receiver / Receiver Long units have VESA standard screw holes 75mm and 100mm apart, see the figure below. Use the 2 screws supplied (or the screws you may find at the back of the monitor) to connect the unit to the back of the monitor.



4. Tuning the Receiver / Receiver Long units

To tune the Receiver / Receiver Long units, see the tuning section of the User Guide. The latest User Guide can be found on our website <http://www.minicomdigitalsignage.com> in the Support section.

www.minicomdigitalsignage.com

International HQ

Dübendorf, Switzerland

Tel: +41 44 823 8000

ds@minicom.com

North American HQ

Linden, NJ, USA

Tel: + 1 908 486 2100

ds.usa@minicom.com

European HQ

Dübendorf, Switzerland

Tel: + 41 44 823 8000

ds.europe@minicom.com

Technical support - ds.support@minicom.com

