



DS OpticVision

Long range player-to-screen multimedia extension

- 30 km/ 19 miles range
- Supports WXGA (1366 x 768)
- Supports HDTV resolutions up to 1080i
- Stereo-audio
- 1 optical fiber single/multi-mode cable
- Easy set up
- No color pixel skewing
- 3 year warranty
- Use with Minicom's AVDS & DS Vision 3000 for optimal point to multi-point distribution

Full multimedia extension and distribution

DS OpticVision is a long range optical fiber extender delivering high resolution video images and stereo-audio from player to plasma/LCD screens up to 30 kilometers (19 miles) away. The system comes fully plug-and-play and can be used either as a standalone extender, as a standalone distribution system, or in combination with Minicom's CATx-based distribution systems.

Realize your digital signage potential

With DS OpticVision's comprehensive coverage, you can set up your media player kilometers from the display screens. Alternatively, install screens in new distant locations away from your main screen cluster. For dispersed installations, connect the system's receivers to Minicom's AVDS or DS Vision 3000 to give instant kilometers of transmission range for hundreds of screens and multiple screen clusters. Whatever the application, whatever the size catchment area, DS OpticVision lets you realize the full potential of your digital signage investment.


All the advantages of optical fiber

DS OpticVision comes interchangeable with both single-mode and multi-mode optical fiber to suit your desired range. The system is based on the latest optical fiber technologies giving network-independent multimedia transmission without the worry of downtime. It's immunity to electrical interference also lets you install the system in any application environment.

Lowest price per distance

Whether across university campuses and central business districts, or between airport terminals, train-stations, or office buildings, DS OpticVision promises the lowest price per distance, and will deliver your multimedia content, picture perfect, every time.

DS OpticVision Typical Application

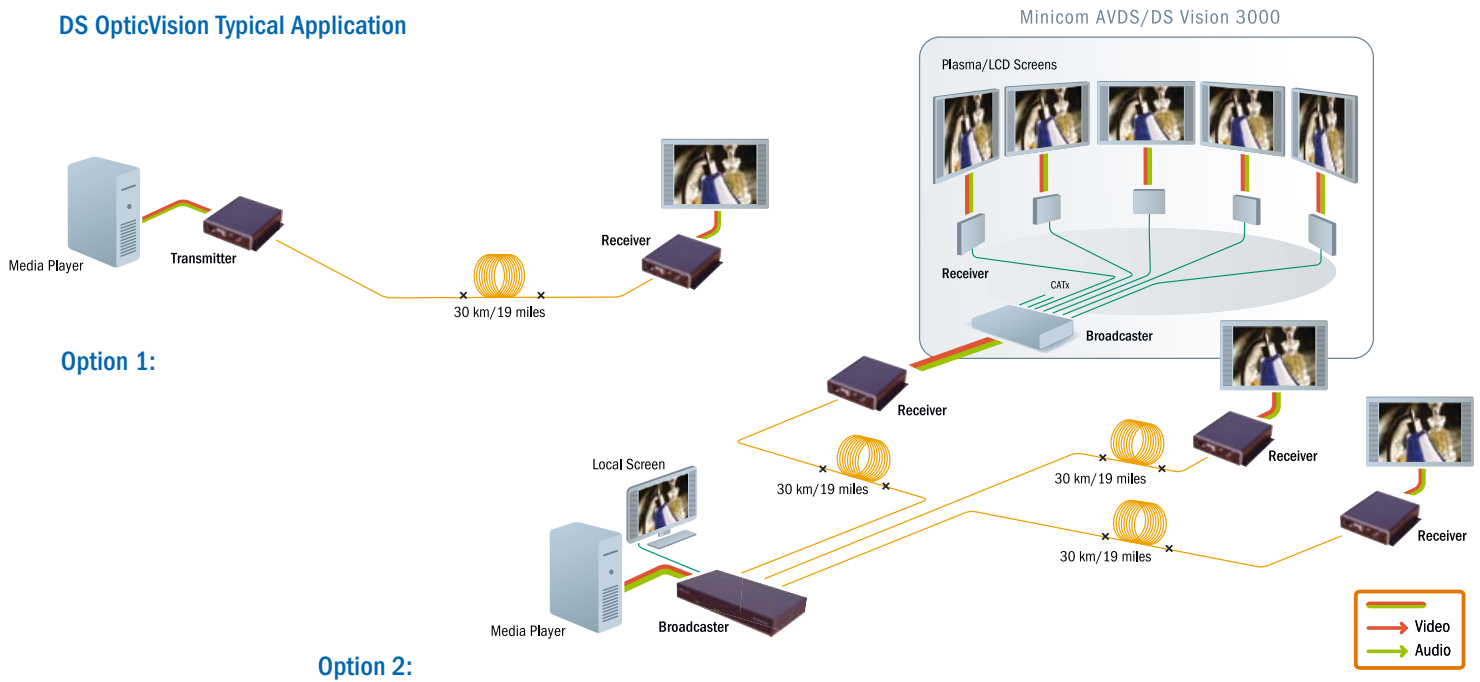

Technical Specifications

System Components	The DS OpticVision consists of the following components: Broadcaster; Extender (transmitter + receiver); Receiver
Resolution	Up to 1366x768 @ 60Hz Supports HDTV 480p, 720p, and 1080i (RGBVH format only)
Input/Output Video Signals	Analog signal red, green, blue p-p 75 Ohm
Input Impedance	RGB: 75 Ohms; H & V: Hi-Z
Input Level	RGB: 714 mV p-p; H & V: 3 to 5 V p-p
H Sync Frequency Range	15 to 60 kHz
V Sync Frequency Range	30 to 85 Hz
Maximum Distance	0.75km with MM/30km with SM (loss budget 0-15 dB)
Audio	Stereo, 2 unbalanced
Sampling rate	24bit
Operating Wavelength	1310nm MM or SM
Optical Fiber	Multimode 62.5/125 microns or 50/125 microns; Single-mode 8-10/125 microns
Relative Humidity	Up to 95% non-condensing
Operating Temperature	-20°C to 60°C / -4°F to 140°F
LED indicators	Power, Video, Audio
Storage Temperature	-20°C to 70°C / -4°F to 158°F
Warranty	3 Years

	Broadcaster	Line splitter	Remote
Cables/Connectors	VGA In - HDD15M VGA Local - HDD15F Stereo audio In/Out - Jack PL 3.5mm System Out - Optical: 4 ST LED's: Power, Video, Audio - Green	System Out - Optical: ST Video In - HDD15F Audio In - 3.5 Jack LED's: Power, Video, Audio - Green	System In - Optical: ST Video Out - HDD15F Audio Out - 3.5 Jack LED's: Power, Video, Audio - Green
Dimensions	44x254x425 / 1.75x10x16.75 mm / inch HxWxL Weight: 2.6kg/5.5lbs	30x127x135 / 1.2x5x5.3 mm / inch HxWxL Weight (with mounting): 284g/10oz	30x127x135 / 1.2x5x5.3 mm / inch HxWxL Weight (with mounting): 284g/10oz
Power	Internal Power 95 - 250VAC	External Adaptor 9 - 24VAC/VDC, 5 watts (max)	External Adaptor 9 - 24VAC/VDC, 5 watts (max)

OPTICAL FIBER



Transmitter/Receiver - Front



Transmitter/Receiver - Back



Broadcaster - Back

Ordering information

Description	Order No.
Broadcaster	OVS00003/R
Extender (Tx+Rx)	OVS00001/R
Receiver	OVS00002/R

Additional Audio/Video Display Solutions:

AVDS
DS Vision 3000



www.minicom.com

International HQ
Jerusalem, Israel
Tel: +972 2 535 9666
Fax: +972 2 535 9693
minicom@minicom.com

Rome, Italy
Tel: +39 06 820 97 902
Fax: +39 06 820 97 903
info.italy@minicom.com

North American HQ
New Jersey, USA
Tel: 888-486-2154
Tel: 908-486-2100
Fax: 908-486-7788
info.usa@minicom.com

Kiel, Germany
Tel: +49 431 668 7933
Fax: +49 431 668 7934
info.germany@minicom.com

European HQ
Dübendorf, Switzerland
Tel: +41 44 823 8000
Fax: +41 44 823 8005
info.europe@minicom.com

Vincennes, France
Tel: +33 1 49 57 00 00
info.france@minicom.com

Camberley, England
Tel: +44 (0) 1276 25053
Fax: +44 (0) 1276 25053
Info.uk@minicom.com